

DECLARATION OF PERFORMANCE

No. CPR_01

1. Unique identification code of the product type: **Dry-pressed ceramic tiles, with water absorption $E_b \leq 0,5\%$ and $0,5\% < E_b \leq 3\%$**
2. Intended uses: **For internal and external walls and floorings**
3. Name or registered trade mark, and contact address of the manufacturer: **NOVOCERAM SAS – Produits céramiques – ZI ORTI, Laveyron, BP44120 - 26240 St Vallier sur Rhône FRANCE**
4. System(s) of assessment and verification of constancy of performance (AVCP): **System 4**
5. Name and identification number of notified laboratory, if relevant : **not relevant**
6. **Declared performances**


Essential characteristics	Performance	Harmonised technical specification
Reaction to fire	A1 _{FL} /A1	EN 14411:2016
Release of dangerous substance (only for GL ceramic tiles):		
- Cadmium	npd	
- Lead	npd	
Breaking strength (thickness $\geq 7,5$)	≥ 1300 N	
Breaking strength (thickness $< 7,5$)	≥ 700 N	
Slipperiness	See table attached	
Tactility	npd	
Bond strength/adhesion	npd	
Thermal shock resistance	Pass	
Durability for:		
- internal use:	Pass	
- external use: freeze-thaw resistance	Pass	

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.

Signed for and on behalf of the manufacturer by:

PAOLO ONFINI, GENERAL MANAGER

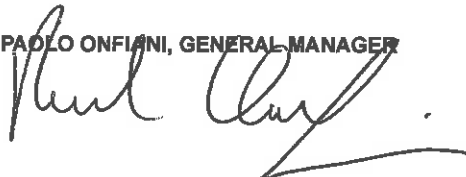

St Vallier sur Rhône, 20/03/2019

Table - Slipperiness rel. 20/03/2019

1/2

Serie	DIN 51130 – DIN 51097
AZIMUT	R10 – A
AZIMUT – OUTDOOR +	R11 – A+B
CAST	R10
CAST STR	R11 – A+B+C
CAST – OUTDOOR +	R11 – A+B+C
CIMENT	R10
CUBES – OUTDOOR +	R12 – A+B+C
DAX	R10
DOMUS	R9
ESPACE	R9
FAST	R10 – A
FAST – OUTDOOR +	R11 – A+B
GEO STR	R11 – A+B+C
GEO STR – OUTDOOR +	R11 – A+B+C
HIRATI	R10 – A
HIRATI STR	R11 – A+B
ICONE	R10
ICONE – OUTDOOR +	R11 – A+B
IRIDIUM	NPD
IRIDIUM AD	R10 – A+B
JASPER	R10 - A
KOBE	R10 – A+B
KOBE STR	R11 – A+B
KOBE – OUTDOOR +	R11 – A+B
LOOK	NPD
MAXIMA	R10 – A
MAXIMA STR	R11 – A+B
MOON	R10
NAPAMI	R10
NOA	R10
NOA – OUTDOOR +	R12 – A+B+C



Table - Slipperiness rel. 20/03/2019

2/2

Serie	DIN 51130 – DIN 51097
NONAME	R9
OTTO – OUTDOOR +	R11 – A+B
OZ	R10 – A
PETITOT	R10
PRESTIGE	R10
RIVIERA	NPD
SAMSARA	R10
SAMSARA STR	R11 – A+B
SAMSARA STR – OUTDOOR +	R11 – A+B
STANDARD	R10 – A
STANDARD AD	R13 – A+B+C
STANDARD EVOLUTION	R10
STANDARD EVOLUTION STR	R11 – A+B+C
STANDARD PASTILLES CARREES	R12 – A+B+C
STANDARD POINTE DE DIAMANT	R12 – A+B+C
STANDARD STR	R11 – A+B+C
STYLE	NPD
TABLON	R10 – A
TABLON - OUTDOOR+	R11 – A+B
TALM	R9
TANGO	R9 – A
VERTIGE	R9
VOYAGE	R9
ZEN	R9

B